
SPECIFICATIONS

Encaustic cement tiles

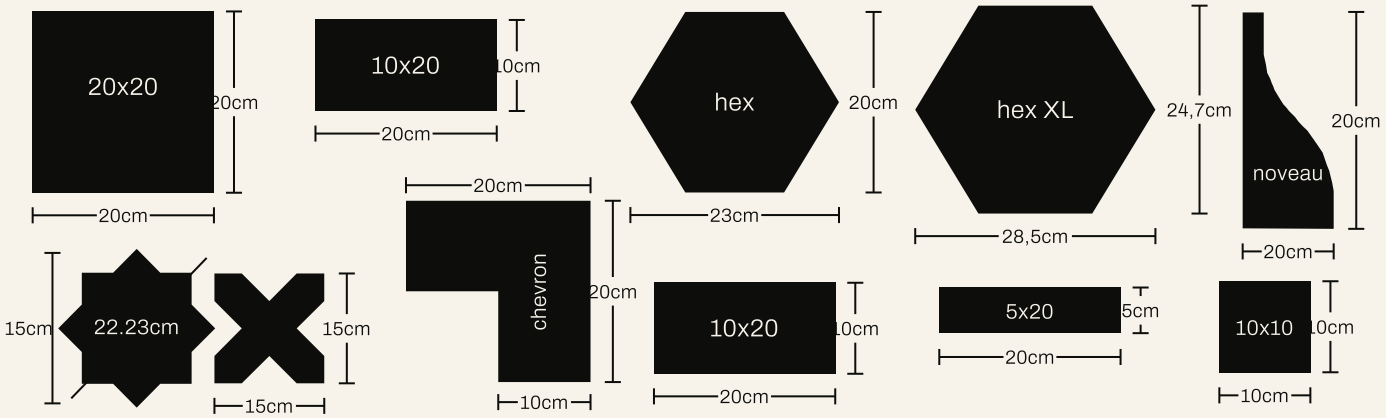

	NOMINAL DIMENSIONS	ACTUAL DIMENSIONS	U/BOX	M2/BOX	BOX DIMENSIONS	BOX WEIGHT
10X10	10x10x1.6cm	10X10x1.6cm	48	0.48	21X21x21cm	15.7 kg
20X20	20x20x1.8cm	20X20x1.8cm	10	0.4	21X21x21cm	15.6 kg
10X20	10x20x1.6cm	10X20x1.6cm	24	0.48	21X21x21cm	15.7 kg
5X20	5x20x1.6cm	5X20x1.6cm	48	0.48	21X21x21cm	16kg
Chevron	20x20x10cm	(20-10)x(20-10)cm	12	0.38	21X21x21cm	12kg
Hex	23x23x1.8cm	23X20x1.8cm	10	0.34	24X22x20cm	13.6 kg
Hex XL	28.5x28.5x1.8cm	28.5X24.5x1.8cm	6	0.33	25X29x12cm	11.9 kg
Noveau	2.5x10x1.6cm	(2.5 - 10)x10x1.6cm	24	0.38	14X20x28cm	10 kg
Cruz - Estrella	15x15x1.6	15x15x1.6	18	0.41	21X21x32cm	13 kg

FINISH	Matte
MATERIAL	Cement
COLOR FACE THICKNESS	3 mm +/-

RECOMMENDED GROUT JOINT	1 - 2mm
INSTALLATION TYPE	Mortar
POSSIBLE LOCATIONS	Indoors / outdoors* *frost and snow with TorraStone®
INSTALLATION OPTIONS	Residential & commercial | shower floor and walls, floors, walls

TILE PERFORMANCE

Mohs hardness | EN 101 - 7

Slip resistance - INDOORS | UNE-ENV 12633 / UNE-EN 13748-1 - μ 0.51 — Class 2

Slip resistance - OUTDOORS | Class 3 - TorraStone® finish or Gaudí relief

Flexural strength | UNE-EN 13748-1 - 2.67 kN, mean value

Total water absorption | UNE-EN 13748-1 - 9.1% (non-vitrified: 7-20%) — before sealing

Difference between the 4 sides of the tile | ± 0.2 mm

Customers are responsible for hiring a qualified installer experienced in the installation and sealing of cement tiles. Based on the technical specifications and product classifications listed above, consult an approved contractor or professional installer regarding the application of these tiles in your specific project and the site conditions before proceeding with installation. Each encaustic cement tile is made by hand, so natural variations in color, shape and thickness are to be expected. Customers should refer to the Encaustic Cement Tile Installation Instructions for further details.