
SPECIFICATIONS

Terrazzo tiles

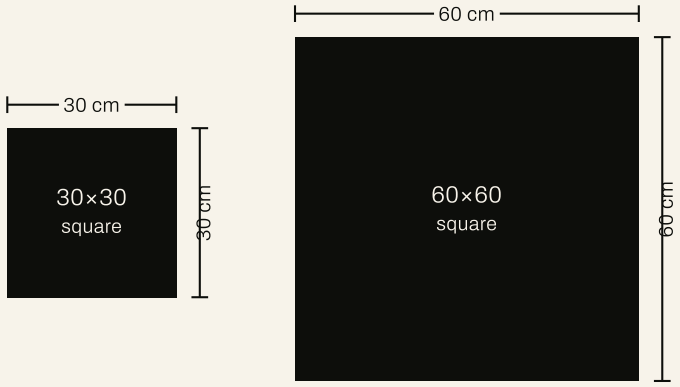

	NOMINAL DIMENSIONS	ACTUAL DIMENSIONS	UNITS / BOX	M2 / BOX	BOX DIMENSIONS	BOX WEIGHT
30x30	30 x 30 x 1.6 cm	30 x 30 x 1.6 cm	10	0.9	31 x 32 x 19 cm	32 kg
60x60	60 x 60 x 1.6 cm	61 x 61 x 1.6 cm	1	0.36	63 x 63 x 2.55 cm	15 kg

FINISH	Matte
MATERIAL	Cement
FINISHES	TorraStone®, Waterproofing

RECOMMENDED GROUT JOINT	2 mm
INSTALLATION TYPE	mortar
LOCATION	indoors / outdoors* *TorraStone for surfaces prone to ice/snow
INSTALLATION OPTIONS	residential & commercial | shower wall and floor, floors, walls

TILE PERFORMANCE

Mohs hardness | EN 101 - 7

Slip resistance | UNE-ENV 12633 / UNE-EN 13748-1 - μ 0.51 — Class 2

Flexural strength | UNE-EN 13748-1 - 2.67 kN, mean value

Total water absorption | UNE-EN 13748-1 - 9.1% (non-vitrified: 7-20%) — before sealing

Customers are responsible for hiring a qualified installer experienced in the installation and sealing of terrazzo tiles. Based on the technical specifications and product classifications listed above, consult an approved contractor or professional installer regarding the application of these tiles in your specific project and the site conditions before proceeding with installation.

Each terrazzo tile is made by hand, so natural variations in color, shape and thickness are to be expected. Customers should refer to the Terrazzo Tile Installation Instructions for further details.